



Eco Log 688




EcoLog[®]

Eco Log 688

The Eco Log 688 is an 8 wheel drive harvester designed to minimize ground pressure when working in sensitive harvesting areas. It is available as a SteepHunter™, which delivers the tractive force and stability required for work in steep slopes.

200 kN
tractive effort

HIGH VISIBILITY



SERVICE FRIENDLY

- Large hoods
- Easily removable/tiltable parts.
- Service ramp for safe and easy access.






4,1 N/cm²
ground pressure*

*Depending on installed equipment.


CRANE EC260

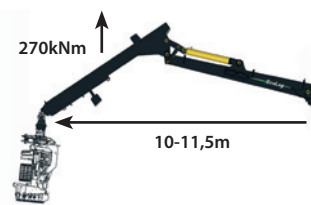

HIGH STABILITY

- 8WD
- Midjoint oscillates $\pm 24^\circ$ sideways.
- Cabin tilt



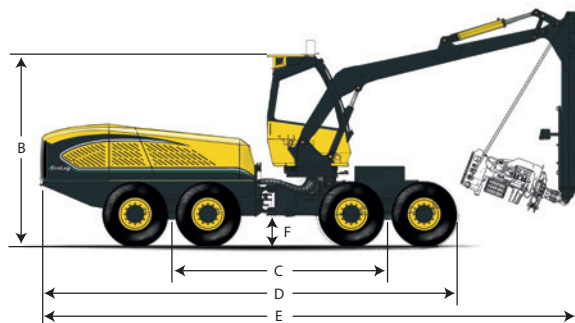

Dimensions	
Approximate weight, kg	21700
Width (A), tires 600 710 800, mm	2700 2910 3041
Height (B), mm	3810
Length (C), mm	4450
Length (D), mm	8579
Length (E), mm	11050
Ground clearance (F), mm	650
Engine	
Type	6 cyl. MB OM 926LA 7.2 l
Stage	Euromot 3b*
Power @ 2200rpm, kW (hp)	225 (306)
Torque @ 1200-1600 rpm, Nm	1200
Fuel tank, l	460
Transmission	
Type	Hydrostatic mechanical
Tractive effort, kN	200
Maximum speed, km/h	20
Hydraulic	
Implement pump for cranes, cc	140
Oil flow @ 1600 rpm for crane, l/min	275
Implement pump for harvester head, cc	145
Oil flow @ 1600 rpm for harvester head, l/min	285
Pressure, Bar	250
Hydraulic tank, l	200
Wheels	
Standard	8 wheels 700/45 - 26.5"
Option	8 wheels 600/55 - 26.5" 8 wheels 800/40 - 26.5"
Crane	
Lifting force, gross, kNm	270
Reach alternatives, m	10 / 11 / 11.5
Slewing torque, gross, kNm	50

Cabin	
Rotation, °	350
Tilt sideways, °	±16
Tilt front rear, °	16 10
Seat	BeGe 7000 (standard) – BeGe 3000 (optional)
Safety	ROPS ISO 80825, FOPS ISO 8083, OPS ISO 8084
Miscellaneous	Radio MP3 with USB port, manual tilt, oven, 12 and 24 volt outputs
Steering	
Steering angle, °	43
Rotation joint, °	±24
Electrical system	
Voltage, V	24
Generator, A	2 x 80
Battery capacity, Ah	2 x 115
Bucking system	
Name	Forester
Processor	Intel® Core™ i3 Mobile, Sandy Bridge Processor
Internal memory	4 GB DDR3 1333 / 1066 MHz
Ports	4 x Serial ports, 4 x LAN, 6 x USB ports (2 x USB 2.0 / 4 x USB 3.0), 1 x CFast slot, 1 x DVI-I, 1 x VGA. Audio: Line-in, line-out, mic-in
Color display	Wide touch screen 15.6"
Operating system	Windows 8 Professional
Working lights	
Amount	20
Alternatives	Halogen, xenon or LED
Harvester head	
Log Max 5000 or Log Max 6000	

* Euromot 4 OM 936, Available Q4 2015

© Eco Log Sweden AB. We reserve the right to make changes in product specifications without prior notice. Some data presented in this document may be theoretical in nature. Pictures and texts are not contractual.